

UltraCharge Pro Power Bank 10K 60W with BoostSolid Cell and Display (BPB044, BBA022)

Model: BPB044 / BBA022



Button Guide



Tap once to scroll to the next page.



Tap twice to scroll to the next page.



Press and hold the key for 2 seconds to turn off the screen (The screen will turn off automatically after 30 seconds of idle status with no operation, charging or discharging.)

Screen Order



Screen Guide



Main Screen

Displays total charging watts and active system protection



Scenario 1

No device connected



Scenario 2

Power bank is charging



Scenario 3

Power bank is discharging



Scenario 4

Pass-through mode active



Wattage Screen

Displays individual port charging watts and available capacity



Temperature Screen

Temperature is good: You're getting the fastest possible charging speed




Cooling mode on: Charging speed is slowed down a little to keep things from overheating



Battery Health


Shows the overall condition of your power bank battery



 **Brightness Adjustment**
Adjust screen brightness for different environments




Power Input

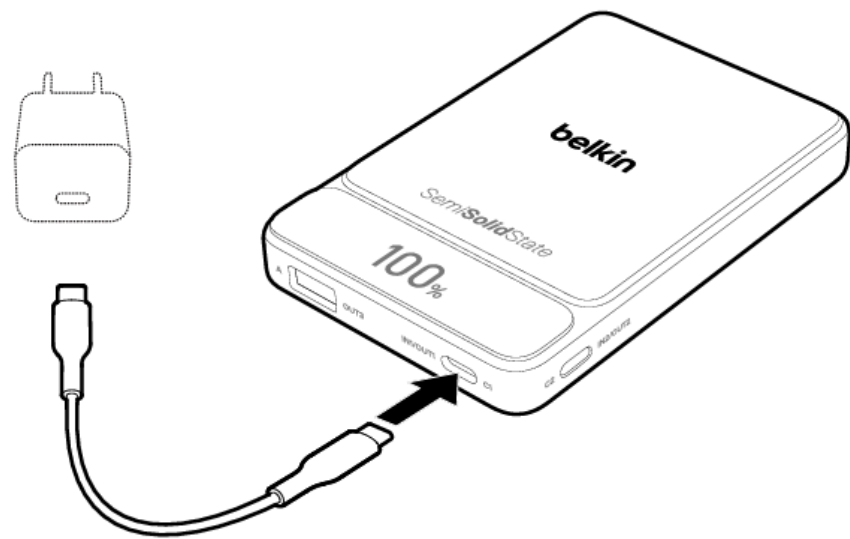

 C1	 C2	 A
≤40W	—	—
—	≤40W	—

Power Output

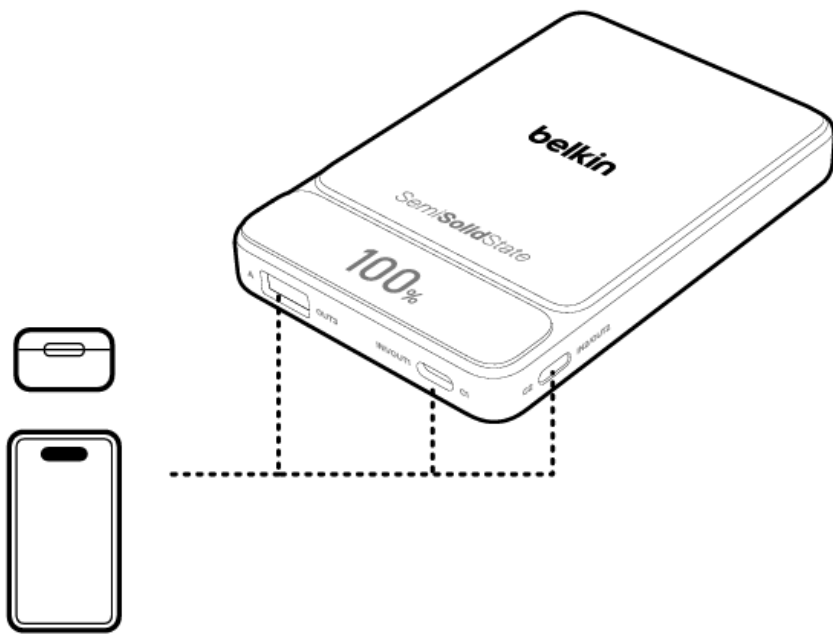

 C1	 C2	 A
≤60W	—	—
—	≤60W	—
—	—	≤22.5W
C1+C2 ≤ 27W		
C1+A ≤ 27W		
C2+A ≤ 27W		
C1+C2+A ≤ 30W		

Pass through		
 C1	 C2	 A
↓ 15W	↑ 15W	
↑ 15W	↓ 15W	